

Professional Power Amplifier

AX SERIES POWER AMPLIFIER


OWNER'S MANUAL

TECHNICAL PARAMETER'S CHANGERS ARE NOT INFORMED.



PROFESSIONAL POWER AMPLIFIER

Our product is improving. When the external form and parameter changes, please refer to the material object. We will not inform you especially.

RL

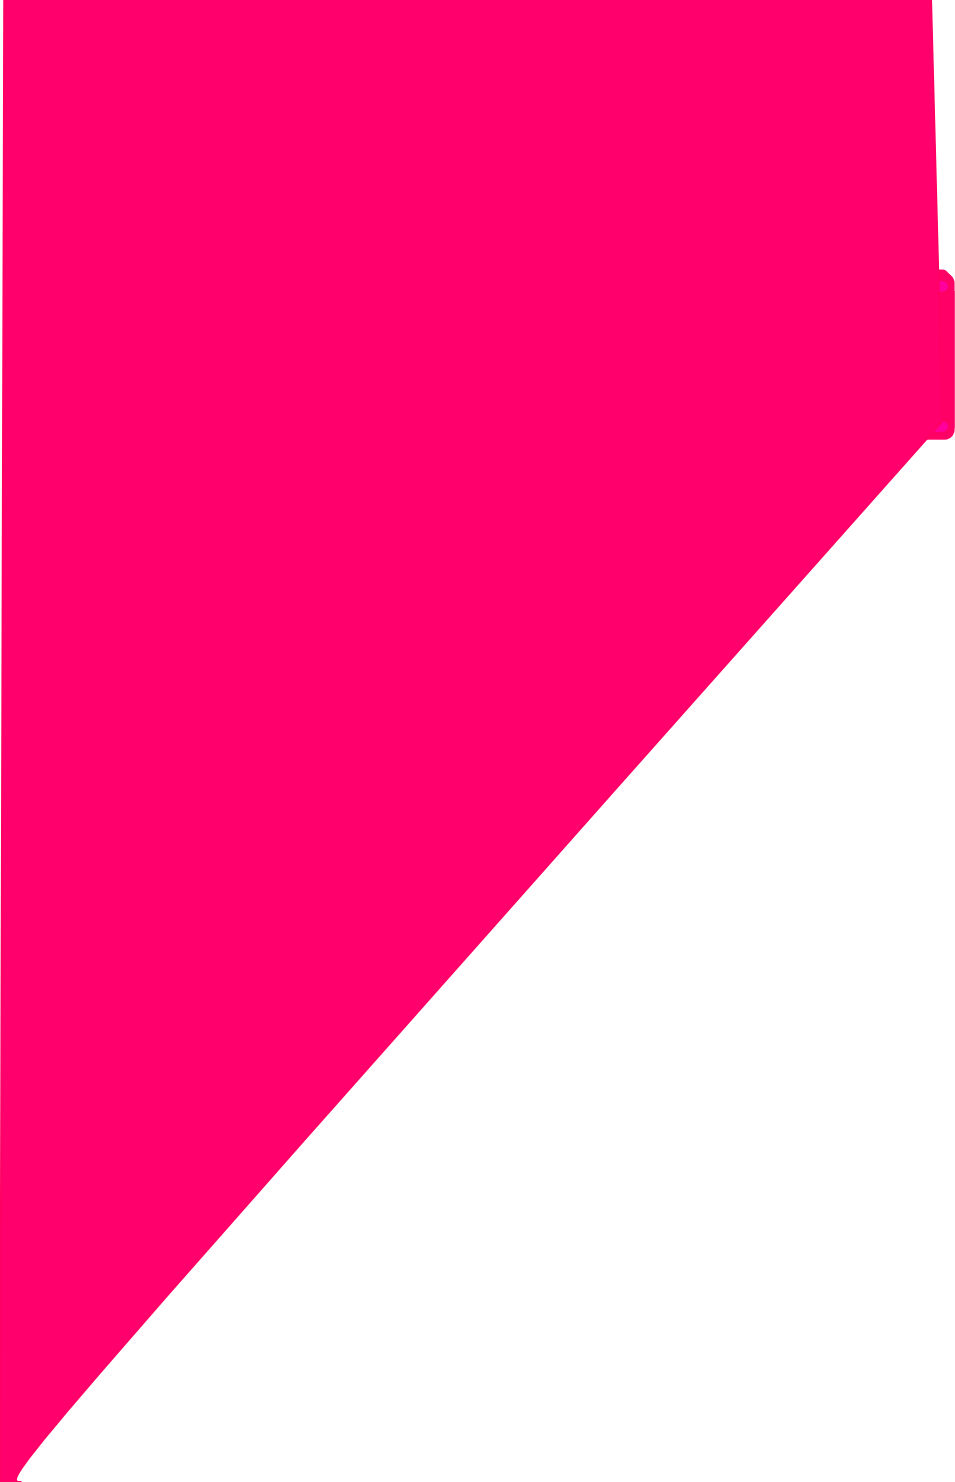

SPECIFICATIONS	
Model	U-10
Stereo power	80W
10k/20k 1% THD	40W
	20W
Bridge mono Power	80W
10k/20k 1% THD	40W
Signal to noise	
Slew Rate	
Damping Factor	
Frequency response	400 Hz-100k Hz, 20Hz-20kHz
THD	≤ 0.01% Rated Power @ 1kHz
IMD	≤ 0.01% Rated Power @ 1000
Input sensitivity	0.775V, 1.0V, 1.55V
LFE	20Hz-160Hz Valid
HFE	130Hz-20kHz Valid
Input impedance	10k/20k ohms, unbalanced or balanced
Input CMRR	≥ 75dB
Cross talk	≤ 70dB
LEP indicator	Signal, Protect, Deafie, Clip/Limiting
Main power supply	~220V 50/60Hz FUSE-T1.5A
Weight	25kg
Dimension(mm)	483Wx490Dx88H

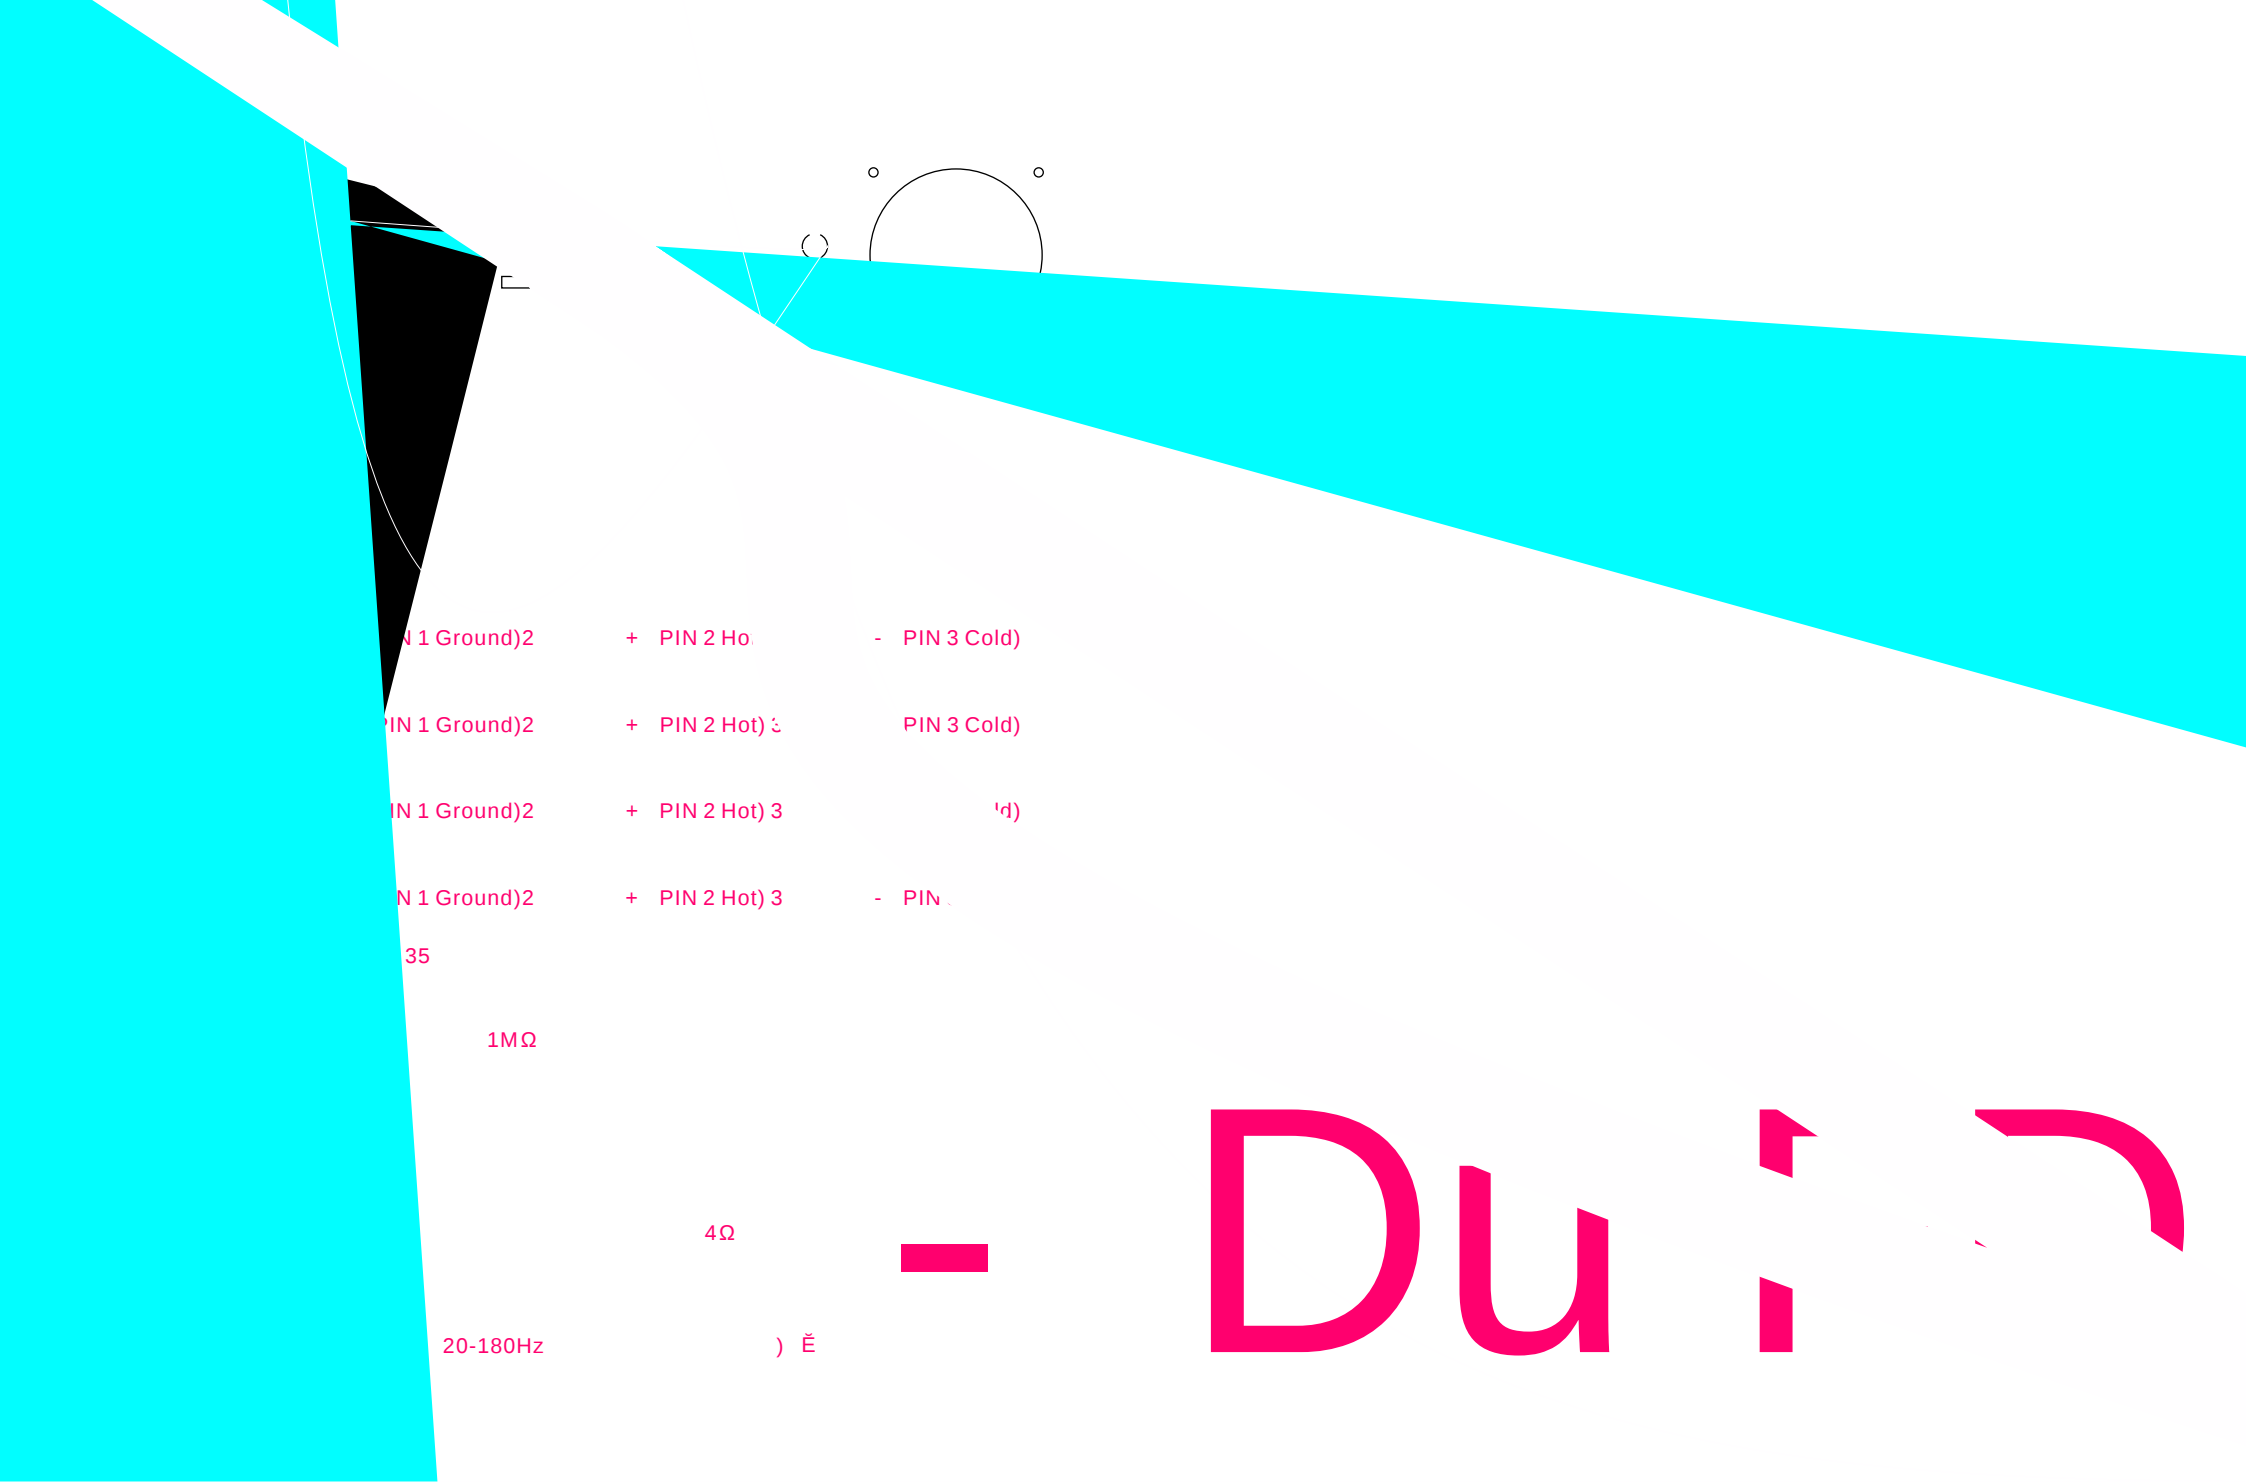

(PIN 1 Ground)2

+ PIN 2 Ho

- PIN 3 Cold)

(PIN 1 Ground)2

+ PIN 2 Hot) 3

PIN 3 Cold)

(PIN 1 Ground)2

+ PIN 2 Hot) 3

'd)

(PIN 1 Ground)2

+ PIN 2 Hot) 3

- PIN

35

1MΩ

4Ω

20-180Hz

) Ě

Du ; 7

1 /
2

3 A 20

4 A LED) LED CLIP

5 B LED) LED CLIP

6 B 20

AX
1
2
AX
3
AX
AX
88
AX
AX
90
□